




PS2 Adapter for APPLE II+

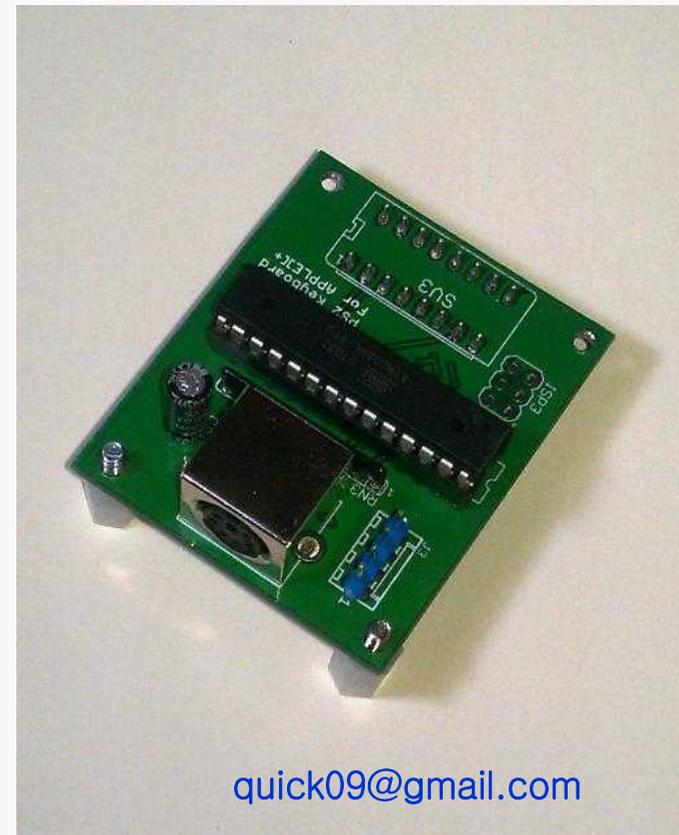

[Http://www.apple2.net](http://www.apple2.net)

Surface

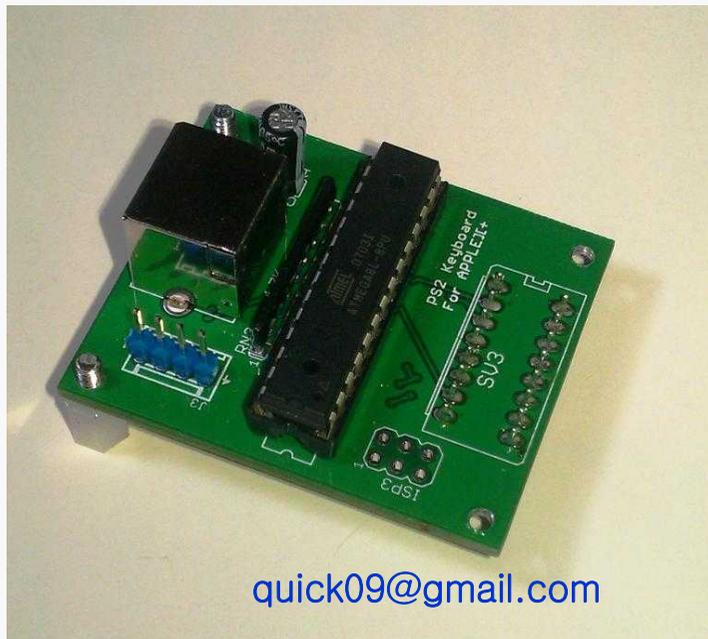

Copyrights by SD Kim, All rights reserved.

quick09@gmail.com

Installation

- ◆ First, Remove power plug on your APPLE II
- ◆ Open APPLE II cover and remove present Keyboard connector.
- ◆ Insert PS2 keyboard in the adapter first.
- ◆ Check the direction of **notch** on Keyboard socket and match the Adapter notch **mark**.
- ◆ Please insert all pin properly, When you insert it, please be careful to avoid bend or missing pin.
- ◆ Make sure 16 pins are properly inserted in APPLE II keyboard socket.
- ◆ Check again if PINS are not miss connected nor skipped.
- ◆ If wrong connected or missing, it may damage the adapter or APPLE II.
- ◆ After inserted, please tie your PS2 keyboard cable to avoid any pulling from the socket.
- ◆ Close the APPLE II cover and Turn on the APPLE II.
- ◆ Please key-in anything.. If not key-in.. OFF the APPLE II immediately and check the socket pins if skipped or wrong direction.
- ◆ If working, That is done. Thanks for purchasing. 😊
- ◆ All adapter was 100% tested before to ship.


Introduction & use way

PS2 keyboard adapter for APPLE][+


- ◇ PS2 keyboard can be used on APPLE][and][+
- ◇ **Number keyboard** can use
- ◇ **CTRL + RESET** → **CTRL + Break** and generate short **Reset signal**
- ◇ **Upper and Lower arrow key** is working as APPLE //e one
- ◇ **Auto Repeat** Support
- ◇ **Caps lock is working** , switching between lower and uppercase, (Caps lock LED doesn't work)
- ◇ Serial pin can receive (9600bps) and send it to APPLE2 (TTL 5V level)
- ◇ **Back space** (<-) is support
 - ◆ It set for APPLE2 BASIC, Move back and erase a key.
- ◇ **Macro** function support
 - ◆ Easy to use; Just key-in and save with 'Alt+Fn' (Max 40 letters)
 - ◆ To invoke it just press 'Fn' then it will type with what you stored key arrays.
 - ◆ This macro data will stored into EEPROM hence wouldn't erased even if Power off.
 - ◆ F3; Recall key; it will retype what you typed before the enter (Max 255 letters)
- ◇ **Others**
 - ◆ Tested; APPLE][+ clone with DELL 106 keyboard
 - ◆ Can't use on APPLE //e nor IIGS. It works only with APPLE][and][+.
 - ◆ Take care the pins, it isn't strong.
 - ◆ Any function and features of board, it may changed for better function or durable without notice.

Connection example

Match the notch with
APPLE II Keyboard
With Adapter mark.

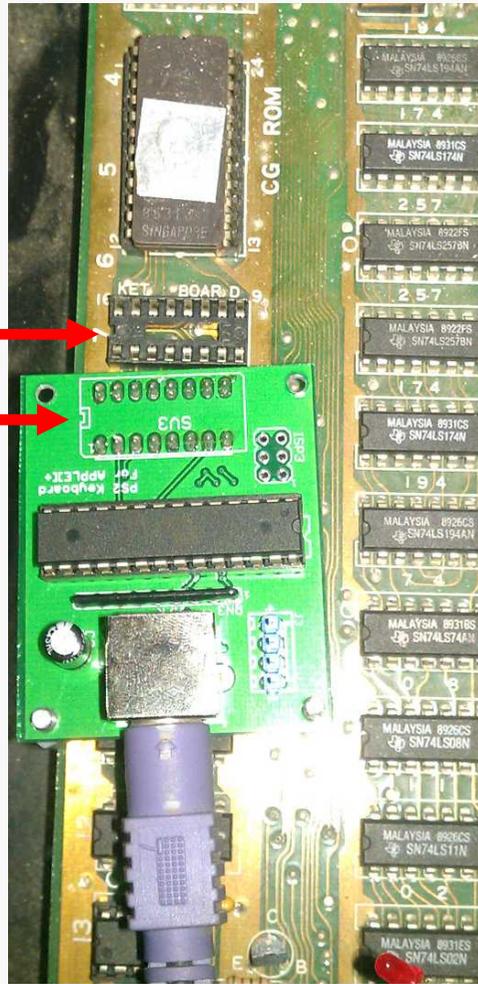

Features

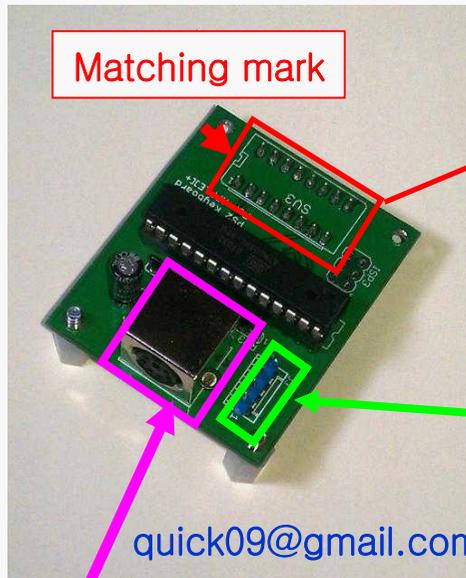

Matching mark

APPLE II Keyboard pins are under the board

Aux signal pin

quick09@gmail.com

For PS2 Keyboard

- 1: Reserved
- 2: Reserved
- 3: Serial RX (9600bps
TTL Level)
- 4: GND

Thanks for purchasing

- ◇ 3 Months Warranty.
- ◇ Contact
 - ◆ Email: quick09@gmail.com
- ◇ If you have any question, please mail me. I will help as much as I can for you.
- ◇ Thank you very much.
Ian Kim

Copyright© 2015 by SD Kim, All rights reserved.

<http://www.apple2.net>